



Please Direct All Correspondence to Customer Number 20995

TRANSMITTAL

Applicant : Saunders, et al.  
App. No : 10/539,687  
Filed : June 16, 2005  
For : DIGITAL PRESS PRINTING  
Examiner : Unknown  
Art Unit : Unknown

CERTIFICATE OF MAILING

I hereby certify that this correspondence and all marked attachments are being deposited with the United States Postal Service as first-class mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450, on

July 11, 2005

(Date)

*Che S. Chereskin*

Che Swyden Chereskin, Ph.D., Reg. No. 41,466

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Sir:

Transmitted herewith for filing in the above-identified application are the following enclosures:

- (X) Certified copy of priority document (GB 0229711.7).
- (X) Return prepaid postcard.
- (X) Please charge any additional fees, including any fees for additional extension of time, or credit overpayment to Deposit Account No. 11-1410.

*Che S. Chereskin*

Che Swyden Chereskin, Ph.D.

Registration No. 41,466

Agent of Record

Customer No. 20,995

(949) 760-0404

This Page blank (uspto)

DOCUMENT PROCESSING  
BRANCH  
JUL 19 2005



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

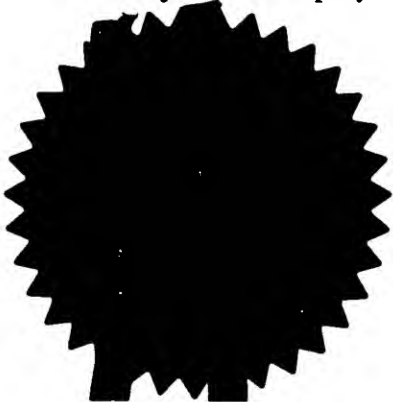

Signed *Andrew Gersey*  
Dated 22 June 2005

*This Page Blank (uspto)*



23DEC02 E772645-1 D00637  
POL/7700 0.00-0229711.7

# Request for grant of a patent **NEWPORT**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference	3697		
2. Patent application number (The Patent Office will fill in this part)	0229711.7		20 DEC 2002
3. Full name, address and postcode of the or of each applicant (underline all surnames)	Arjo Wiggins Fine Papers Limited Fine Papers House Lime Tree Way, Basingstoke Hampshire RG24 8BA  Patents ADP number (if you know it) 7804990002  If the applicant is a corporate body, give the country/state of its incorporation <u>UK</u> United Kingdom		
4. Title of the invention	Digital Press Printing		
5. Name of your agent (if you have one)	Richard John NOR Intellectual Property Arjo Wiggins Appl Butler's Court Beaconsfield Bucks HP9 1RT  Patents ADP number (if you know it) 4332219001		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Urquhart Dykes & Lord 413 Midsummer Boulevard CENTRAL MILTON KEYNES MK9 3BN.  01628 40008 7804990002		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:			
a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	Yes		

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

8

Description

Claim(s)

Abstract

Drawing(s)

CF

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

R. J. Norris Authorised Agent 19 December 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

R.J. Norris

(01494) 652241

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

Patents Form 7/77

Patents Act 1977  
(Rule 15)

THE PATENT OFFICE  
PE  
17 DEC 2003  
RECEIVED BY FAX

The  
Patent  
Office

17DEC03 B150723-1 D02835  
P07/7700 0.00-0229711.7 NONE

7777

**Statement of inventorship and of  
right to grant of a patent**

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference SMR/MAW/P550672

2. Patent application number 0229711.7  
(if you know it)3. Full name of the or of each applicant  
ARJO WIGGINS FINE PAPERS LIMITED4. Title of the invention  
DIGITAL PRESS PRINTING5. State how the applicant(s) derived the right  
from the inventor(s) to be granted a patent.BY VIRTUE OF THE INVENTORS' CONTRACT  
OF EMPLOYMENT WITH THE APPLICANT  
COMPANY6. How many, if any, additional Patents Forms  
7/77 are attached to this form?  
(see note (c))7. I/We believe that the person(s) named over the page (and on  
any extra copies of this form) is/are the inventor(s) of the invention  
which the above patent application relates to.

Signature



Date

16.12.03.

8. Name and daytime telephone number of  
person to contact in the United Kingdom  
SIMON RAYNOR - 01908 666645**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- Once you have filled in the form you must remember to sign and date it.

Patents Form 7/77

0089112 17-Dec-03 11:50

**Patents Form 7/77**

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

**SAUNDERS, RICHARD DAVID**  
15 WOOD CLOSE  
WINDSOR  
SL4 3JZ

Patents ADP number (if you know it): 8779480001

**SINCLAIR, PETER**  
ALDWIN  
LONDON ROAD EAST  
AMERSHAM  
HP7 9DH

Patents ADP number (if you know it): 8779498001

**Reminder**

**Have you signed the form?**

Patents ADP number (if you know it):

**Patents Form 7/77**

0089112 17-Dec-03 11:50



Digital Press Printing

- 5 This invention relates to digital press printing using liquid toner compositions, often referred to as "inks" or "electro-inks". Liquid toner digital presses have been extensively commercialized by Indigo N.V., now Hewlett-Packard, Indigo and these presses are widely referred to simply as "Indigo"\* presses.
- 10 Digital presses are particularly suited to short printing runs for which traditional printing, particularly colour offset printing, can be uneconomic and slow because of the high cost and time penalties involved in producing printing plates and setting up the press at the start of the run. By contrast, a digital press has no printing plates or comparable set-up costs. It therefore permits a rapid response to print orders ("fast turnaround"), and the
- 15 cost per impression is not significantly influenced by the total number of impressions being made. These factors make a digital press ideal for short-run printing, typically up to about 800 impressions, but sometimes up to about 3000 impressions. Since the information to be printed is stored in electronic form ("digitised"), rather than physically on a printing plate, initial and repeat print-runs can be made "on demand" without the
- 20 need for physical changes to the press. A further benefit is that variable and non-variable information can be merged between every consecutively printed copy, so that individual impressions within a print run can be personalised or customised so as to be specific to a particular recipient or reader.
- 25 Most digital press technology is based on non-impact printing or imaging technology of the same general kind as used in plain paper photocopiers and laser printers, i.e. on the use of an electrostatically-charged roll and charged toner particles for image formation. An electrostatically-charged photosensitive roll (the "photoreceptor") is exposed to light
- 
- 30 in an imagewise configuration such that the surface electrostatic charge on the exposed areas of the photoreceptor is dissipated. Toner is then brought into contact with the photoreceptor, and adheres strongly to it in the unexposed (and thus still electrostatically-

charged) areas of its surface, from which it can be transferred to the paper either directly or indirectly via an offset roll.

5 A single pass through the printing unit provides a monochrome image, but a colour print of a quality comparable to that obtainable by traditional colour offset printing can be achieved either by multiple passes through a printing unit using differently-coloured toners or by a single pass through an array of printing units each of which applies a differently-coloured toner. Typically four passes or printing units are used, three of which apply coloured toners and the other of which applies a black toner. The coloured  
10 toners are such that when used individually and in suitable combinations, they can provide a complete spectral range for the finished print, in much the same way as is achieved in conventional colour printing by the use of a black and three differently-coloured inks.

15 Currently-commercialised digital presses can be divided into two groups according to the type of toner used, i.e. whether it is a "dry toner" or a "liquid toner". Dry toners are of a fine particulate nature, with each particle comprising pigment particles bound together in a thermally-fusible polymeric binder matrix. Once the toner has been applied to the paper, heat is used to melt the polymeric binder component of the toner and so "fuse" the  
20 toner particles together and to the paper. By contrast, liquid toner compositions comprise very fine toner particles dispersed in a fairly high-boiling organic liquid vehicle, together with dispersed binder particles. During the printing operation, most of the vehicle is thought to be removed and the toner is heated to an elevated temperature (typically 70 - 90°C) sufficient to convert the binder particles to a liquid state. Removal of the vehicle  
25 results in an increase in toner viscosity, which facilitates transfer of the toner to the offset roll (if used) and to the paper, with the paper surface absorbing the residual liquid vehicle. The binder reverts to a solid state after the toner has been applied to the paper and so fixes the image (there is no subsequent "fusing" of the toner after its transfer to the paper, such as occurs in dry toner processes).

30

A problem sometimes encountered with liquid toner digital press printing is that the toner does not bond firmly to the paper. As a result, it can become dislodged, so that the print

lacks permanence. This problem can be overcome for most applications by suitable choice of paper. For example pigment-coated printing papers generally give good results, whereas uncoated papers may not, unless they are specially treated (as disclosed for example in European Patent Application No. 879917A or International (PCT) Patent Applications Nos. WO 96/06384A or WO 00/44568A). However, even with such papers, there is a risk that toner-printed characters can be removed from a printed document using a scalpel or other means and then replaced by other characters. As a result, liquid toner digital press printing has not been widely used for security printing purposes for which it would otherwise be well suited, particularly the printing of security documents containing variable or personal information such as a monetary amount, or the name or photograph of a payee, account holder, document owner or card owner. It will be understood that the expression "security documents" in this context includes not just complete documents but also inserts to be incorporated in such documents or in plastic cards with a security function, for example credit or charge cards, membership or identity cards, etc.

Although there may still be scope to improve the strength of the bond between paper and liquid toner inks, we have conceived an alternative approach to the prevention of attempts at fraudulent alteration of security documents or the like which have been printed using liquid toner digital presses. This approach is based on an appreciation of the possibilities offered by the liquid nature of the toner composition, and more particularly that the liquid vehicle in the composition can be used not just for toner and binder, as at present, but also for a novel security ingredient. More specifically, we propose to include a security ingredient in the toner composition which interacts with a complementary paper or other printable substrate to produce a visual or other recognizable effect which will remain even if the toner itself is interfered with or removed, thereby making attempts at fraudulent alteration evident and consequently ineffective.

---

Accordingly, the present invention provides, in a first aspect, a liquid toner digital press imaging composition, characterized in that the composition contains, in addition to the toner, a security ingredient interactable in use with a printable substrate so as to be

detectably retained in or on the substrate in the event of fraudulent alteration or removal of the image produced by the toner.

5 In a second aspect, the present invention provides a liquid toner digital press imaging system comprising a liquid toner digital press imaging composition and a printable substrate, characterized in that the imaging composition contains, in addition to the toner, a security ingredient interactable in use with the printable substrate so as to be detectably retained in or on the substrate in the event of fraudulent alteration or removal of the image produced by the toner.

10

The security ingredient may take a variety of forms, for example it may be:

- 15 (i) a reactant reactable in use with a complementary reactant carried by the printable substrate so as to generate a coloured, fluorescent or chemically-detectable image on the substrate having the same configuration as the toner-printed image (by a “chemically-detectable” image is meant an image which can be revealed by application of a complementary reagent which reacts with the security ingredient to produce colour or a colour change);
- 20 (ii) a visible dye which is absorbed and/or wicked away by the substrate so as to produce a “halo” effect around the periphery of the toner image and/or an image on the opposite surface of the substrate as a result of “strike through”, i.e. penetration, to the opposite surface of the substrate; or
- 25 (iii) a fluorescent material which acts in a similar way to the visible image just mentioned but which is invisible under normal lighting conditions but visible when illuminated with UV light.

30 The fluorescent systems referred to above provide covert security, in that the presence of the security feature is not immediately apparent, in contrast to overt, i.e. visible, systems as in (ii) above or the colour image generation variant in (i) above.

The arrangement described in (i) above is currently preferred, in that the requirement for a reaction between a component in the toner imaging composition and a component carried by the substrate makes forgery or counterfeiting especially difficult and also serves as a means of verifying that both the imaging composition and the substrate are genuine. The last-mentioned feature is particularly useful, in that digital printing technology can lend itself to counterfeiting as well as genuine production (dishonest press owners equipped with a scanner could fairly readily capture a design format from an original and then input their own images and personalised printing to produce a multiplicity of individual fakes).

Systems (i) to (iii) described above all have the advantage that authentication or verification is very simple, relying on visual examination or simple equipment such as a UV lamp or a pen or other applicator to apply a complementary reagent. In principle however, systems relying on more complex means of verification could be used, for example electronic sensors for detection of magnetic or conductive materials, or spectroscopic analysis to test for the presence of specific chemicals.

If desired, more than one security ingredient can be present in the imaging composition, to provide added security. In such a case, the security ingredients used can fall into one or more of the categories described in (i) to (iii) above.

Apart from the presence of the security ingredient, the imaging composition can be conventional in nature. Typically it comprises a fine particulate toner dispersed in a liquid vehicle together with a binder.

The printable substrate is normally a natural or synthetic paper, but in principle could be any other material having a printable surface (a "synthetic paper" is a plastics sheet material manufactured so as to simulate the printability, stiffness, handling and other characteristics of natural cellulosic paper, for example a product as sold under the trade mark "Polyart" by Arjobex Limited, Clacton-on-Sea, England). A natural paper offers a wider range of authentication or verification possibilities, since it is absorbent and therefore can permit strike-through and/or wicking to produce a halo effect.

In a preferred embodiment of the invention, the colour generating reactant in the imaging composition is a colourless chromogenic material (often termed a "colour former") of the kind used for image generation in pressure-sensitive copying papers (often termed "carbonless" copying papers) and the complementary reactant in the printable substrate is a colour developer of the kind used in such papers. In principle however, any colour generating combination of reactants can be used in the present invention, provided the reactant for inclusion in the toner is soluble or otherwise capable of reacting in the liquid vehicle used in the toner composition to an extent sufficient to facilitate a colour generating reaction in use, i.e. when the toner composition contacts the complementary reactant carried by the substrate.

Chromogenic materials and colour developers as just referred to are very well known and are extensively disclosed in detail in the patent and other literature relating to pressure-sensitive copying papers. A paper presented by Dr. J.C. Petitpierre at the 1983 Tappi Coating Conference and entitled "Dyes and Chemicals for Carbonless Copying Paper: History, Present Situation, Problems and Trends" provides a useful introductory source of reference for this technology.

Preferred colour formers for inclusion in the liquid toner imaging composition include: phthalides such as 3,3-bis (1-n-octyl-2-methylindol-3-yl) phthalide as disclosed in British Patent No. 1389716 and commercially available as "Pergascript"\* Red I-6B from Ciba Speciality Chemicals and 3,3-bis(4-dimethylaminophenyl)-6- dimethylaminophthalide, more commonly known as Crystal Violet Lactone or CVL, and commercially available under the names "Pergascript"\* Blue I-R from Ciba Speciality Chemicals, "Copikem"\*1 from BF Goodrich and as "CVL" from Yamada Chemical Co. Ltd., Kyoto, Japan; and fluorans such as 3-diethylamino-6-methyl-7-(2',4'-dimethylanilino) fluoran as disclosed in British Patent No. 1339968 and commercially available under the name "Black XV" from Yamamoto Chemicals Inc., Osaka, Japan, and 3-diethylamino-7-dibenzylaminofluoran, commercially available as "Pergascript"\* Green I-2GN from Ciba Speciality Chemicals, "Green 300" from Yamada Chemical Co. Ltd., "Copikem"\*5 from BF Goodrich and "Green 8-C" from Hodogaya Chemical Co. Ltd., Tokyo, Japan.

Preferred colour developers for use in the printable substrate include : acid-washed montmorillonite clays such as disclosed in British Patent No. 1213835 and commercially available under the names "Fulacolor"\* from Rockwood Additives Ltd., Widnes, U.K., "Silton"\* from Mizusawa Industrial Chemicals Ltd., Tokyo, Japan and "Copisil"\* from  
5 Süd Chemie A.G., Moosburg, Germany; phenolic resins, such as described in U.S. Patent No. 3672935 or No. 4612254; organic acids or metal salts thereof, e.g. as described in U.S. Patent No. 3024927, European Patent Application Nos. 275107A, 503443A or 521474A, or German Offenlegungsschrift No. 4110354A; or salicylated phenolic resins such as those disclosed in European Patent Application No. 194601A and  
10 supplied under the trade mark "Durez" by Durez Corporation, Dallas, USA and N.V. Durez Europe S.A., Genk, Belgium or as disclosed in European Patent Application No. 338 808A and supplied by Schenectady Chemicals, Schenectady USA.

To prepare the printable substrate, the colour developer material is first formulated into a  
15 coating composition with a suitable binder, for example a styrene-butadiene or other latex and, optionally, other materials such as pigments to improve printability, fillers, viscosity modifiers and additives of various kinds. The coating composition is then coated on to the substrate using blade, rod, air-knife, metering roll, metered size press, or other conventional coating methods.

20 Conveniently, the coating composition is formulated in a similar manner to conventional colour developer compositions as used in pressure-sensitive copying paper, and the printable substrate can of course actually be a colour developer sheet as manufactured for use as a CF or "Coated Front" sheet in pressure-sensitive copying systems. This may  
25 offer economic advantages, since such products are well-established and widely available.

The organic colour developer materials referred to above are oil-soluble, and so if desired they may be used in a reverse arrangement to that just described, i.e. as the colour  
30 generating reactant in the liquid toner composition, with solid colour former material present in the printable substrate as the complementary reactant.

Although the reactant in the printable substrate is typically present in the form of a surface coating, it could in principle be present as a loading or impregnant within the body of the substrate, particularly when the substrate is of paper.

- 5 The paper or other substrate used in the present invention may contain sensitisers or other conventional security chemicals as commonly used in security papers to provide an additional safeguard against attempts at fraudulent alteration using, for example, bleaches, solvents, proprietary ink removers and such like. Such security chemicals must of course be compatible with the security ingredient used.

10

The invention will now be illustrated by the following Example, in which all parts and percentages are by weight unless otherwise stated.

#### Example

15

- 0.1% and 1% solutions of a red-developing colour former ("Pergascript"\* Red I-6B) were made up in an isoparaffinic solvent ("Isopar L\*" supplied by Exxon Chemical). 8 parts of fine particulate toner formulated in a paste of a kind conventionally used for liquid toner digital press printing and sold as "ElectroInk"\* by Hewlett Packard, Indigo were then dispersed in 100 parts of each of the colour former solutions to produce a liquid toner "ink". The resulting inks were then separately applied to respective 49 g m<sup>-2</sup> carbonless CF sheets ("Idem"\* CF, supplied by Arjo Wiggins Limited, Basingstoke, United Kingdom) using a laboratory gravure coating plate to simulate the action of a digital press. After the ink had dried, the toner could be removed from the papers by scraping with a finger nail. A red residual developed image remained in each case and revealed that the originally-applied toner image had been tampered with and removed.

25

---

\* In this specification, an asterisk indicates a proprietary trade mark.